

# IL Series Red Laser Module



Part No: IL-6515-**XXX-XX-X**

**XXX(Wavelength): 635, 650, 670.....**

**XX(Output Power): 1, 5, 10.....**

**X (Lens): G , P. (G-GLASS, P-PMMA)**




## Specification

Wavelength ( $\lambda$ )	: 635nm, 650nm, 660nm, 670nm.
Operating Voltage (Vop)	: DC5V.
Operating current (Iop)	:
Optical Output Power (After Lens)	: <1mW, 3mW, 5mW, 7mW, 10mW.
Lens	: PMMA (P), Glass (G).
Laser Pattern	: Dot
Laser Operation (Mode)	: Continuous (CW)
Laser Structure	: Single Mode Laser
Power Stability	: <1%
Wavelength Drift	: 0.2nm/°C
Laser Class	: Class II, Class IIIA.
Control Circuit	: Auto Power Control
Operating Temperature	: -10°C ~ +50°C
Storage Temperature	: -40°C ~ +80°C
Electrical Connections	: +Red, -Black
Cable	: 22 cm
Dimension	: 12 mm(D) X 32 mm(L)
Housing Material	: Aluminum

## Application

- Measurement
- Bio-analytical
- Automation
- Alignment

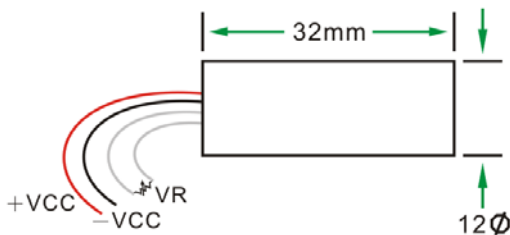

### Operational Hazard-Semiconductor Laser Diode Module:

This laser module emits radiation that is visible and harmful to human eye. When in use, do not look directly into the laser emitting aperture. Direct viewing of laser diode emission at close range may cause eye damage.

**Limited Warranty:** One year. No warranty coverage for disassembly, modifications or damage due to abuse or misapplication.

**E-Laser Enterprise Co., Ltd**

No 398, Jinghe E. Rd., Beitun District, 406 Taichung City, Taiwan.

Tel: 886-4-2436-9426 Fax: 886-4-2436-5843

E-Mail: [laser.ling@msa.hinet.net](mailto:laser.ling@msa.hinet.net)

<http://www.linelas.com.tw/>