

IL Series Infrared Line Laser Module



Part No: IL-8701-**XXX-XX-X**

XXX(Wavelength): 780, 808, 850, 980.

XX(Output Power): 1, 5, 10.....

X (Lens): G, P. (G-GLASS, P-PMMA)



Specification

Wavelength (λ)	: 780nm, 808nm, 850nm, 980nm.
Operating Voltage (Vop)	: DC5V.
Operating current (Iop)	:
Focus Lens	: PMMA (P), Glass (G).
Cylinder Lens	: Glass (BK7).
Optical Output Power (After Lens)	: <1mW, 3mW, 5mW, 7mW, 10mW, 15mW, 20mW..
Laser Pattern	: Line. (Angle 30°, 60°, 90° 120°)
Laser Operation (Mode)	: Continuous (CW).
Laser Structure	: Single Mode Laser.
Power Stability	: <1%.
Wavelength Drift	: 0.2nm/°C.
Laser Class	: Class II, Class IIIA.
Control Circuit	: APC + Regulator.
Operating Temperature	: -10°C ~+50°C .
Storage Temperature	: -40°C ~+80°C .
Electrical Connections	: +Red, -Black.
Cable	: 22 cm.
Dimension	: 13.5 mm(D) X 45 mm(L)
Housing Material	: Copper


Operational Hazard-Semiconductor Laser Diode Module:

This laser module emits radiation that is visible and harmful to human eye. When in use, do not look directly into the laser emitting aperture. Direct viewing of laser diode emission at close range may cause eye damage.

Limited Warranty: One year. No warranty coverage for disassembly, modifications or damage due to abuse or misapplication.

Application

- Measurement
- Bio-analytical
- Automation
- Alignment

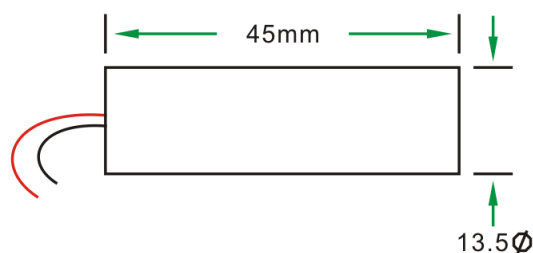

iLaser Optoelectronics Co., Ltd

No 398, Jinghe E. Rd., Beitun District, 406 Taichung City, Taiwan.

Tel: 886-4-2436-9426 Fax: 886-4-2436-5843

E-Mail: laser.ling@msa.hinet.net

<http://www.linelasar.com.tw/>